




F I G . 1

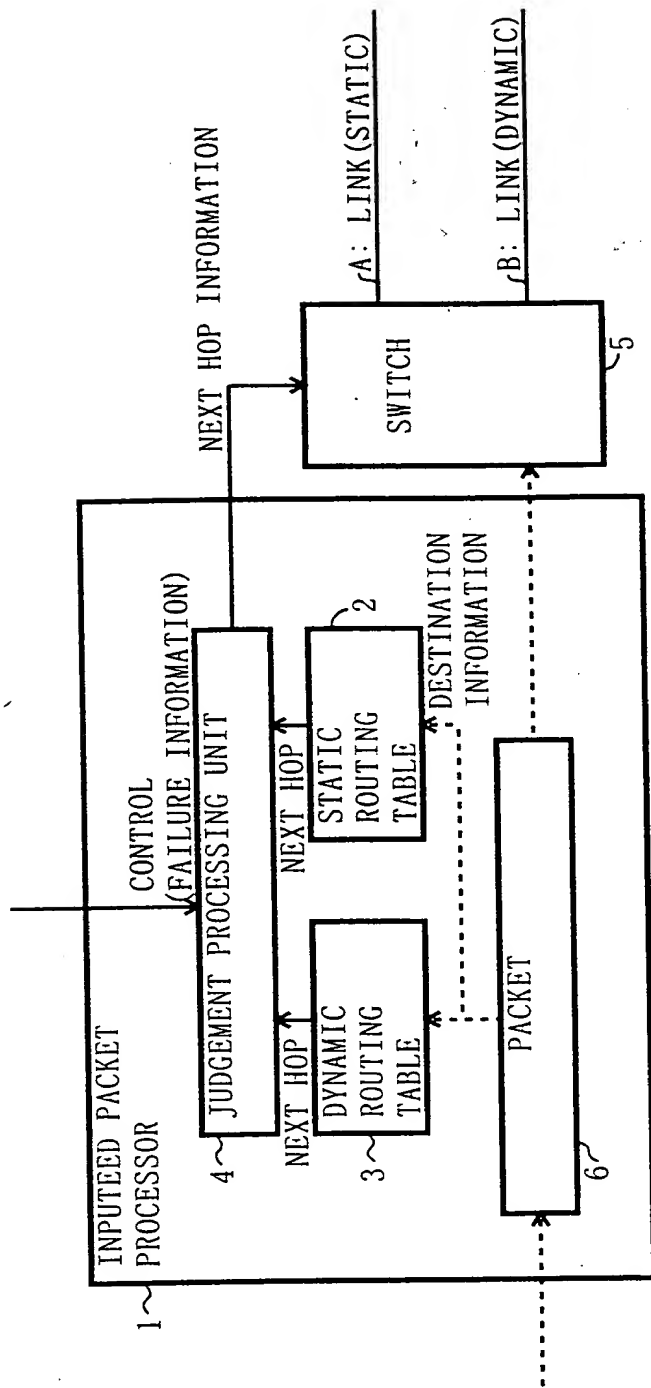


F I G . 2

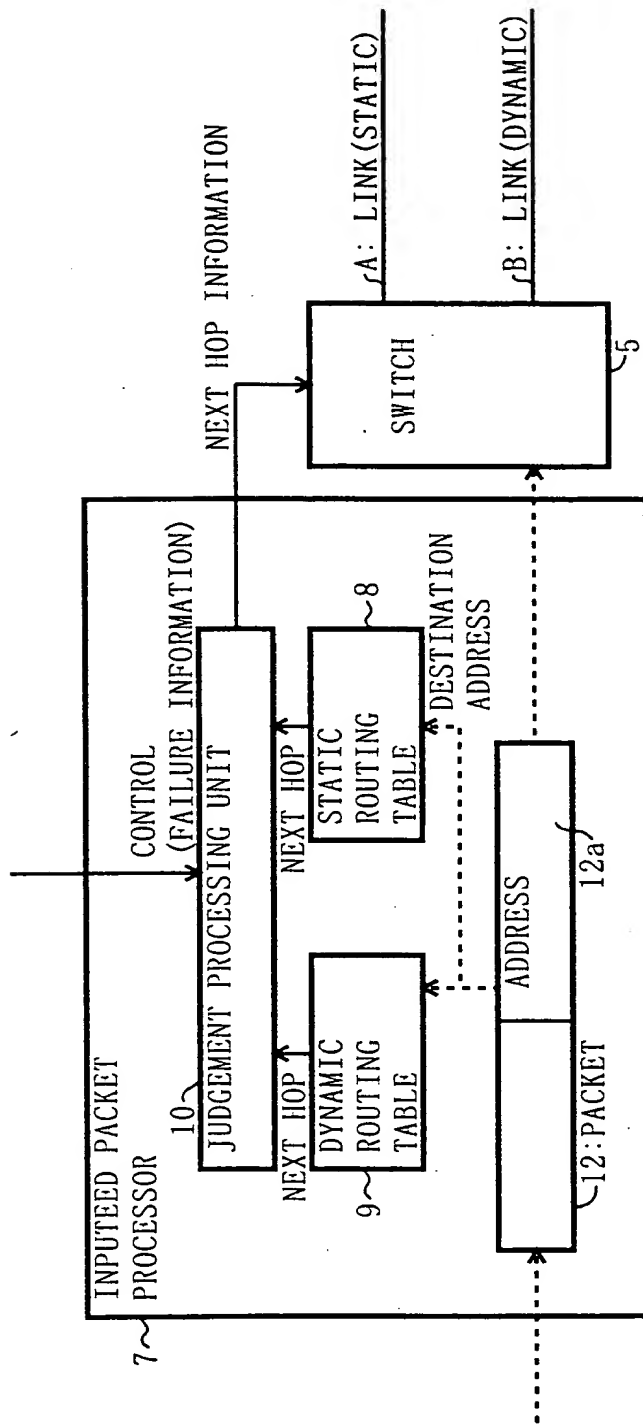


F I G . 3

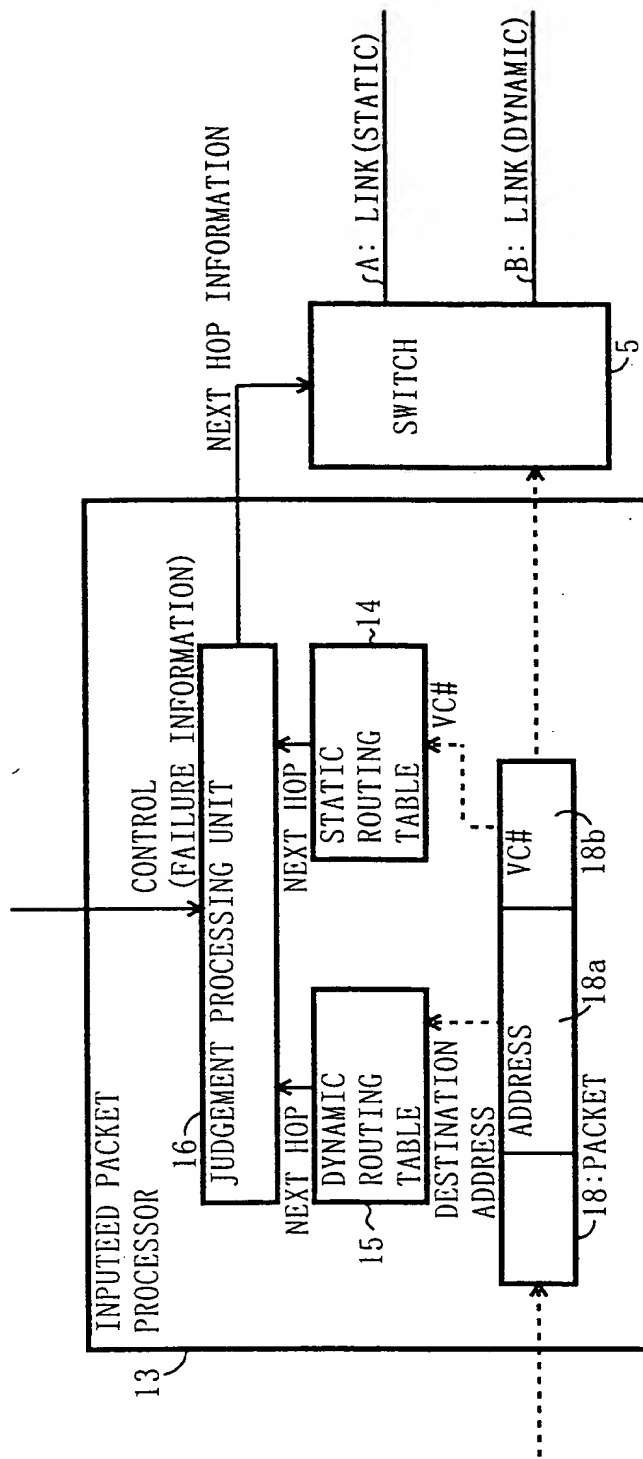

F I G . 4

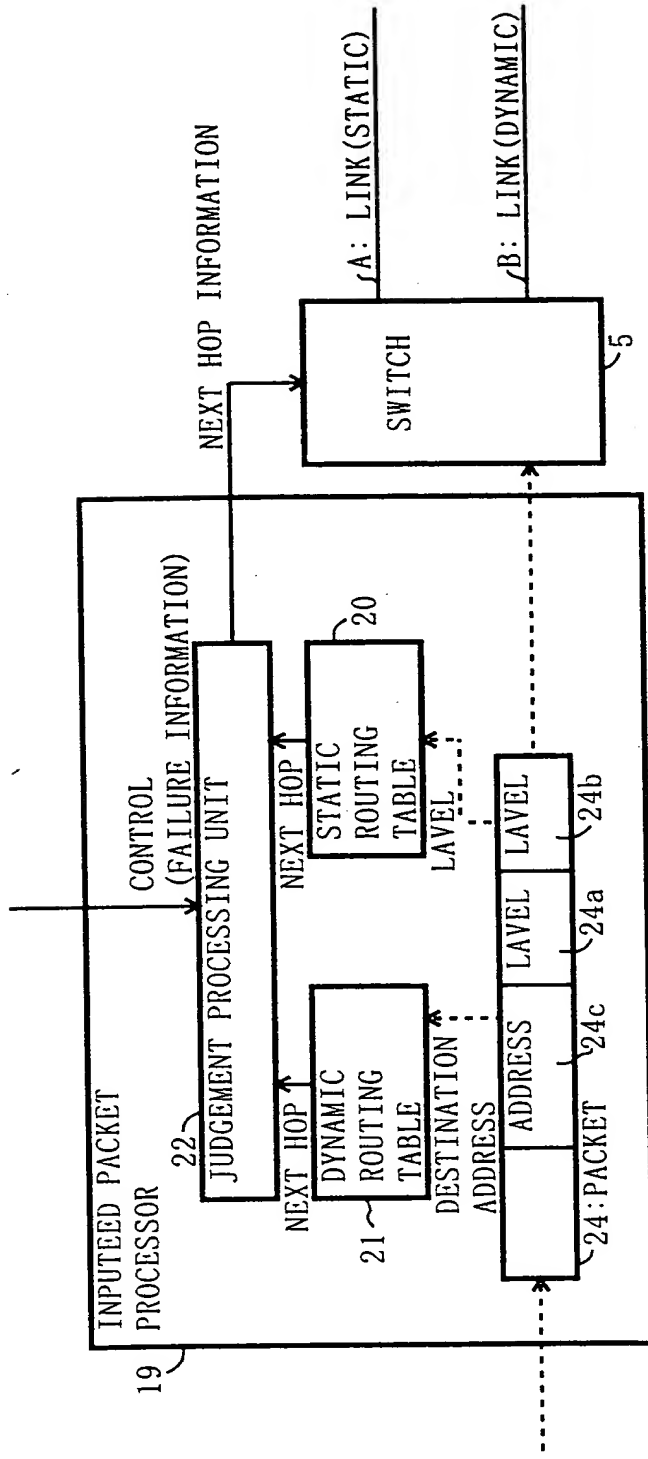

F I G . 5

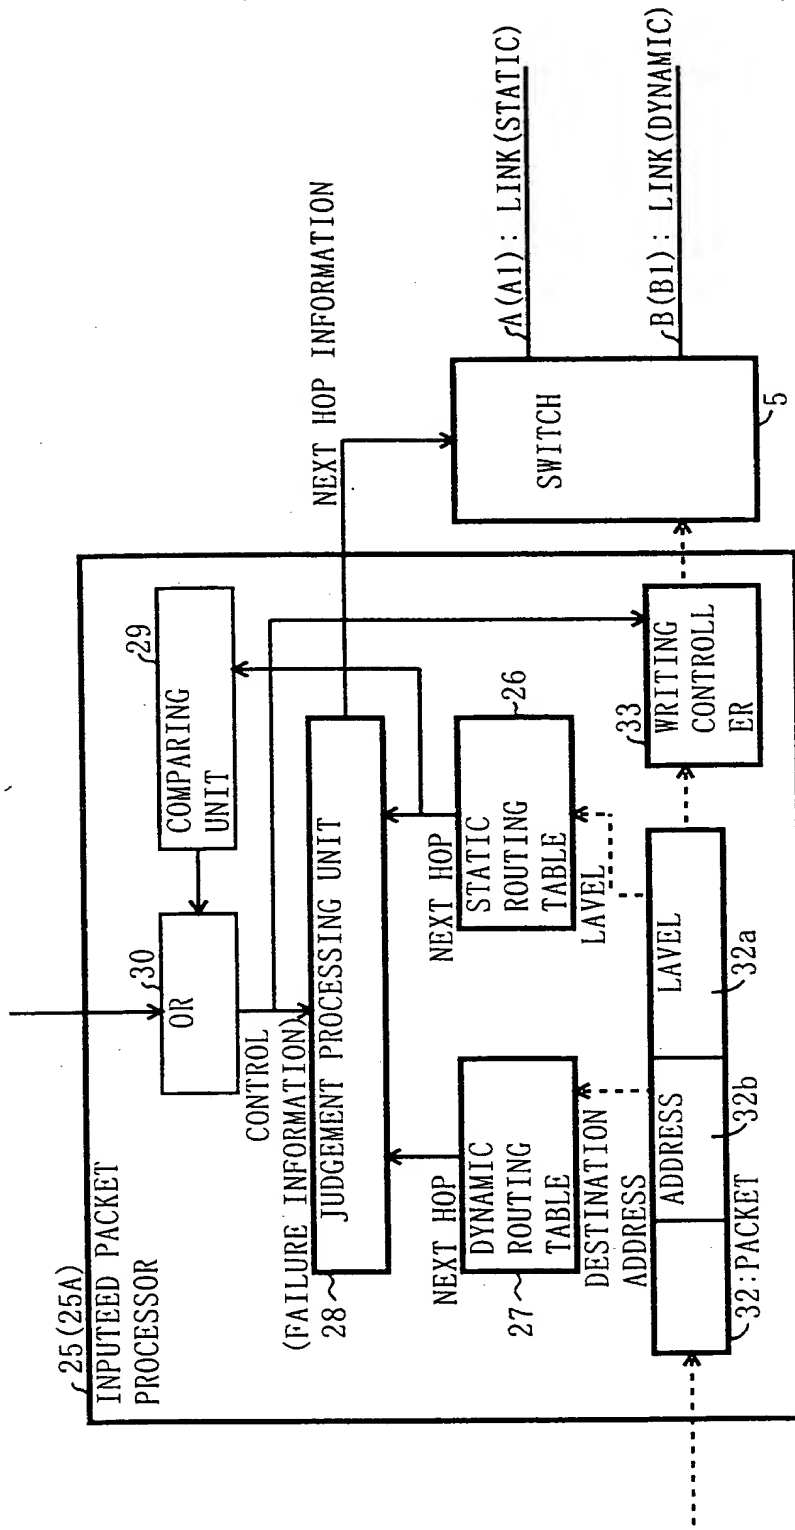

F I G . 6

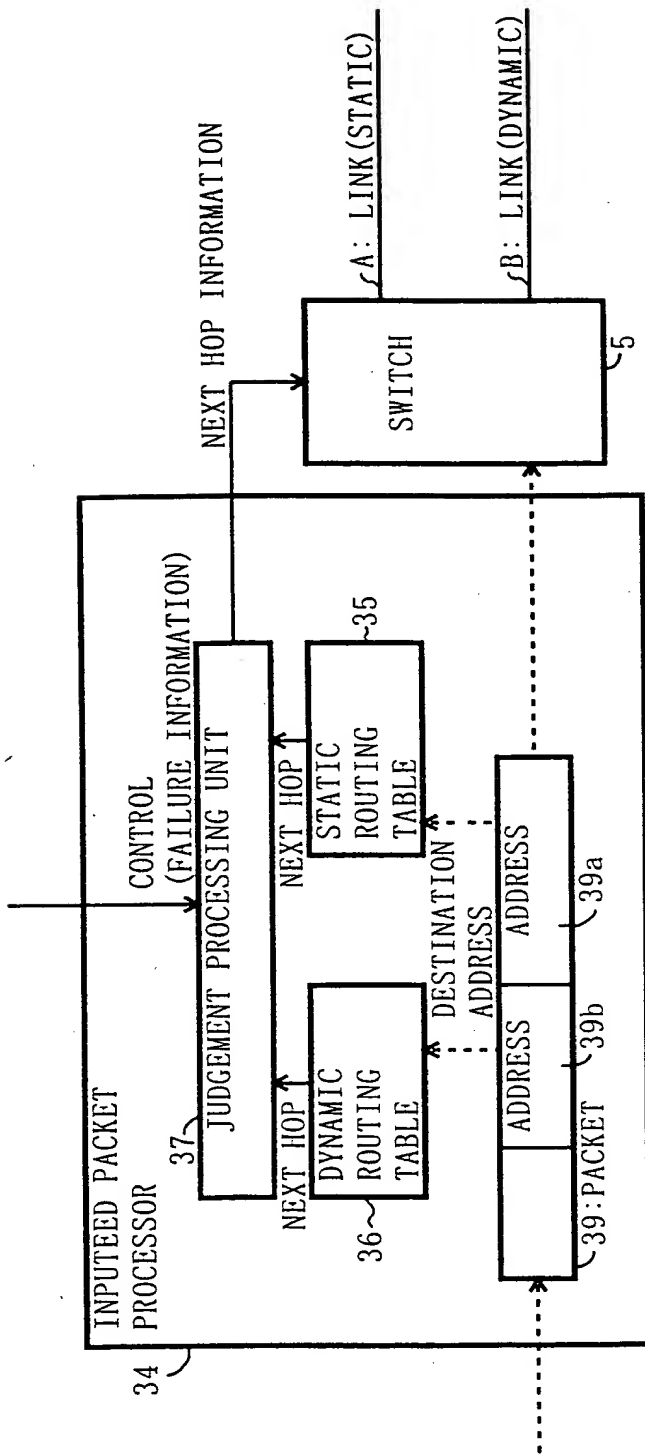


FIG. 7

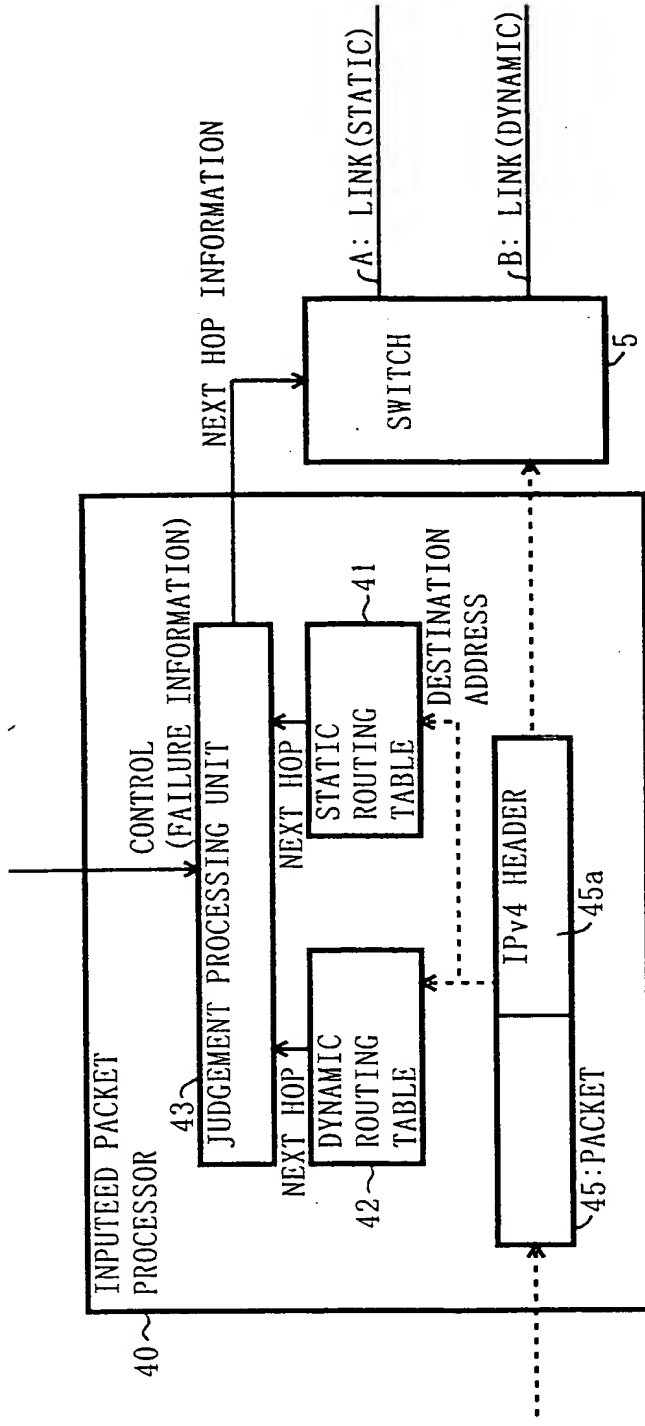


FIG. 8

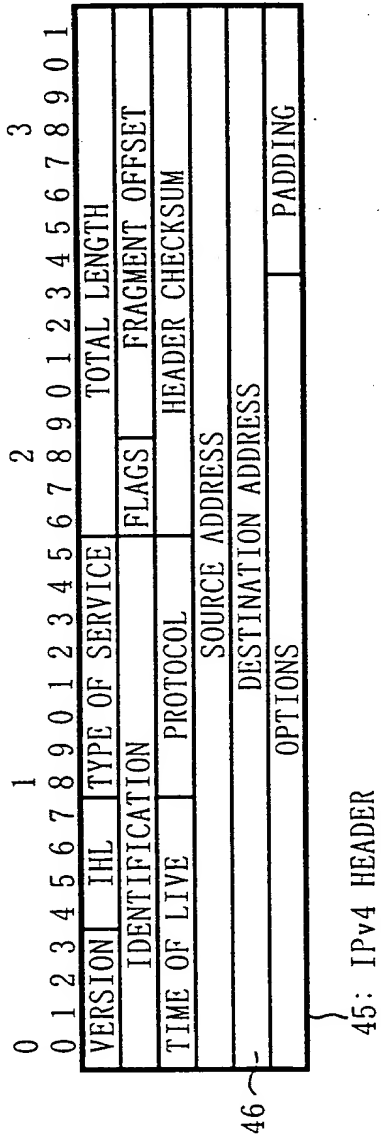


FIG. 9

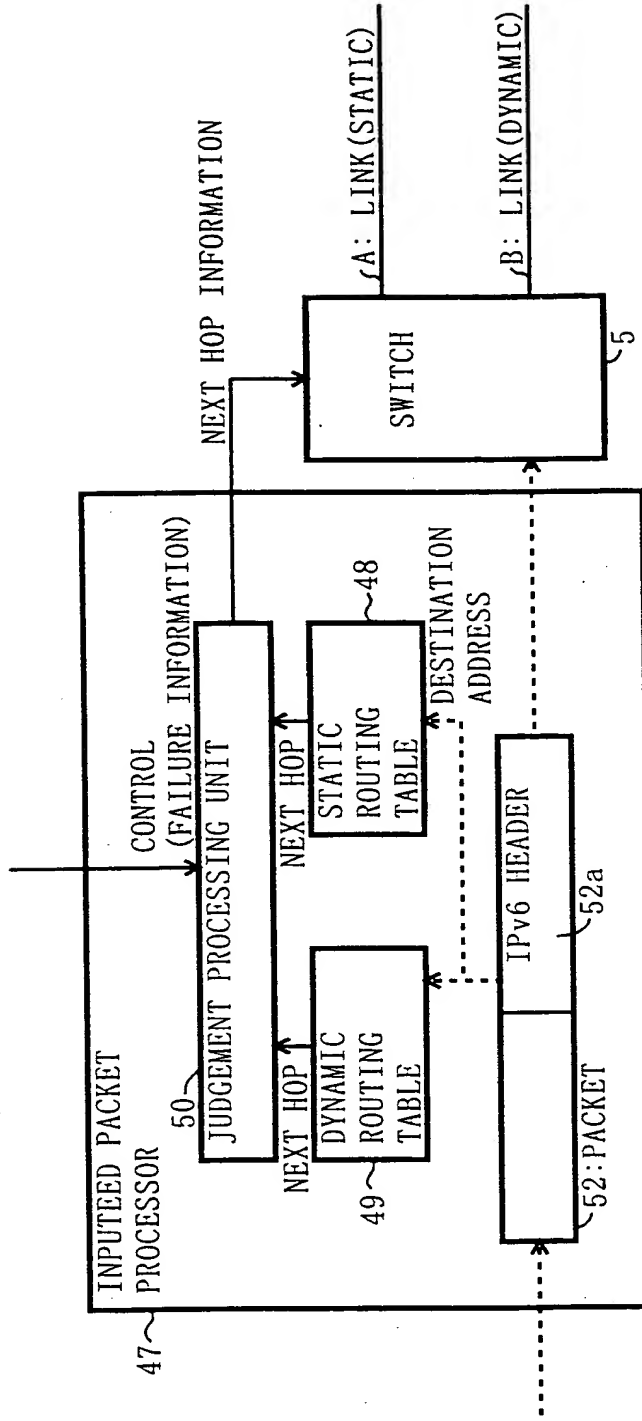


FIG. 10

52a: IPv6 HEADER

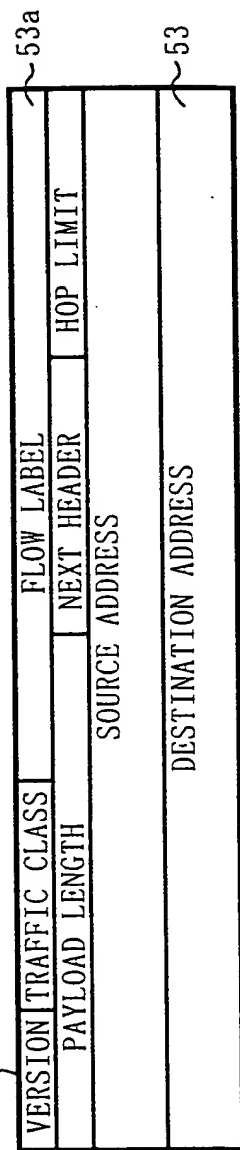


FIG. 11


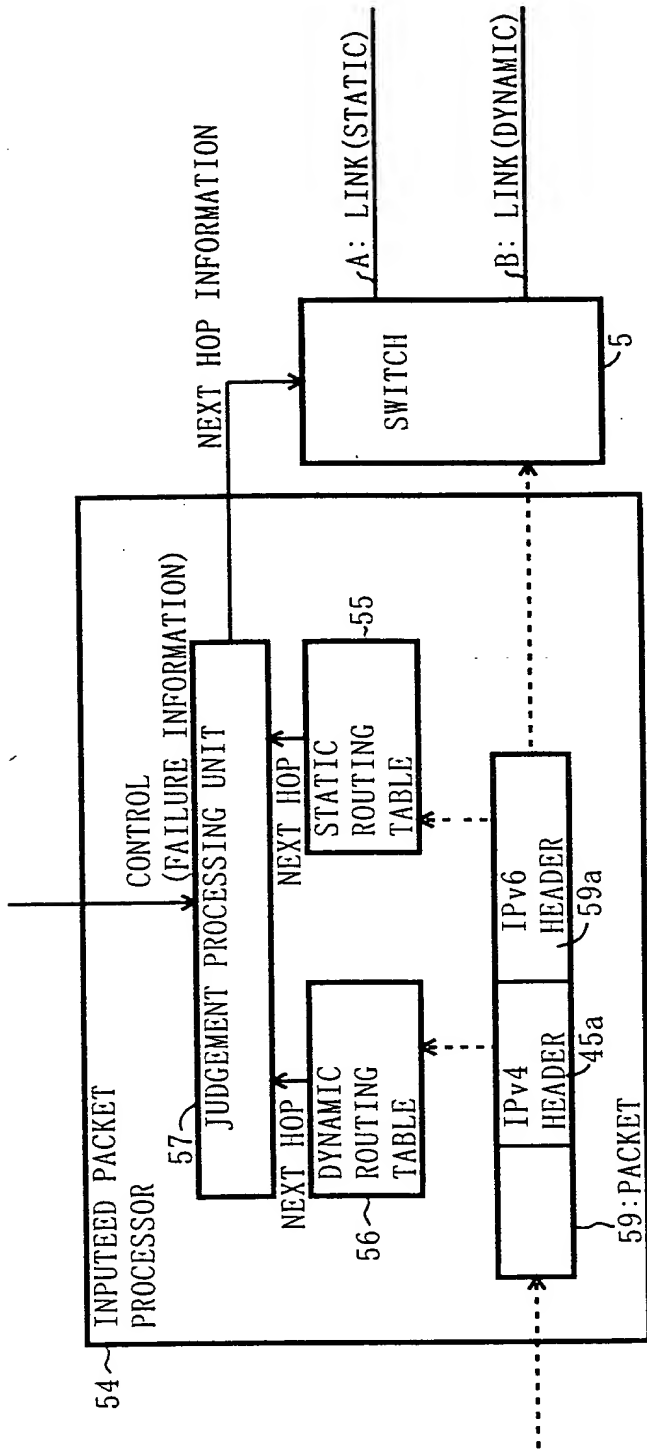


FIG. 12

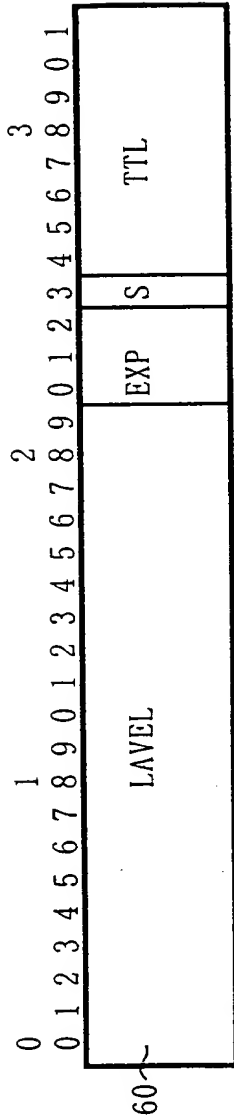

59a: MPLS SHIM HEADER

L: LABEL VALUE, 20 BITS
 EXP: EXPERIMENTAL USE, 3 BITS
 S: BOTTOM OF STACK, 1 BIT
 TTL: TIME TO LIVE, 8 BITS

FIG. 13

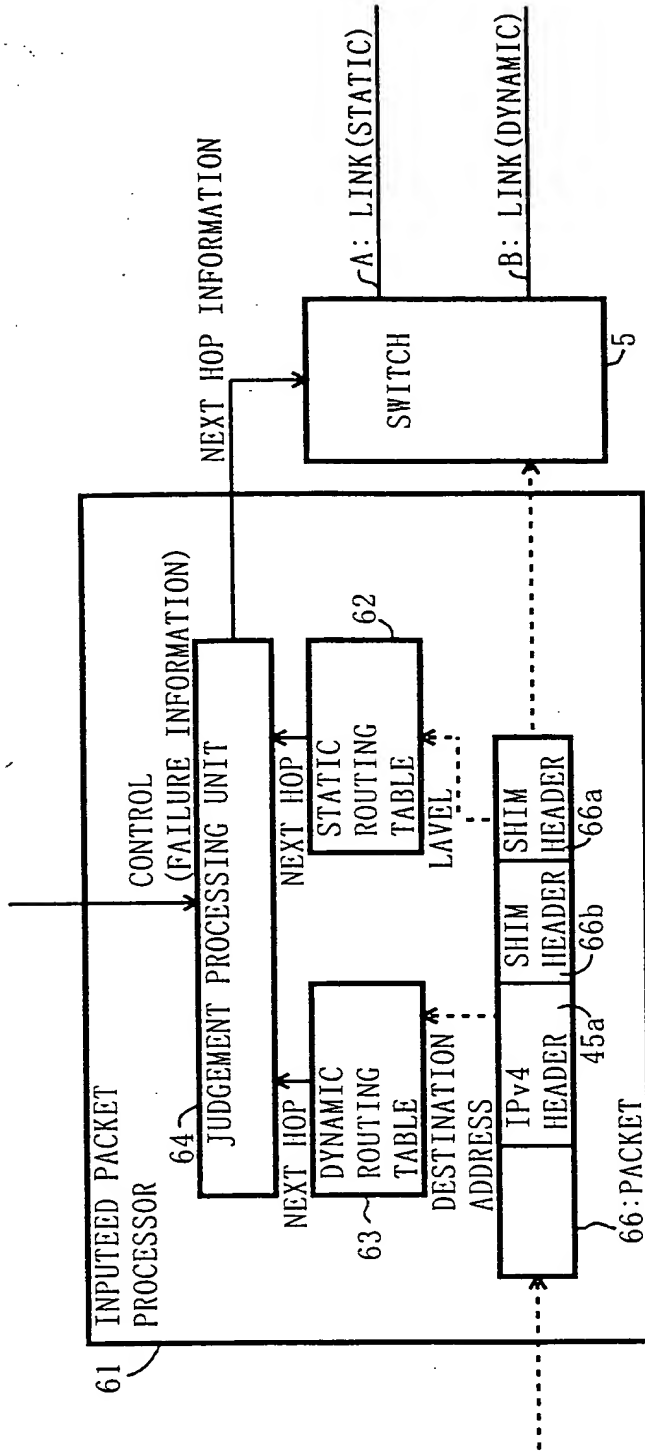


FIG. 14

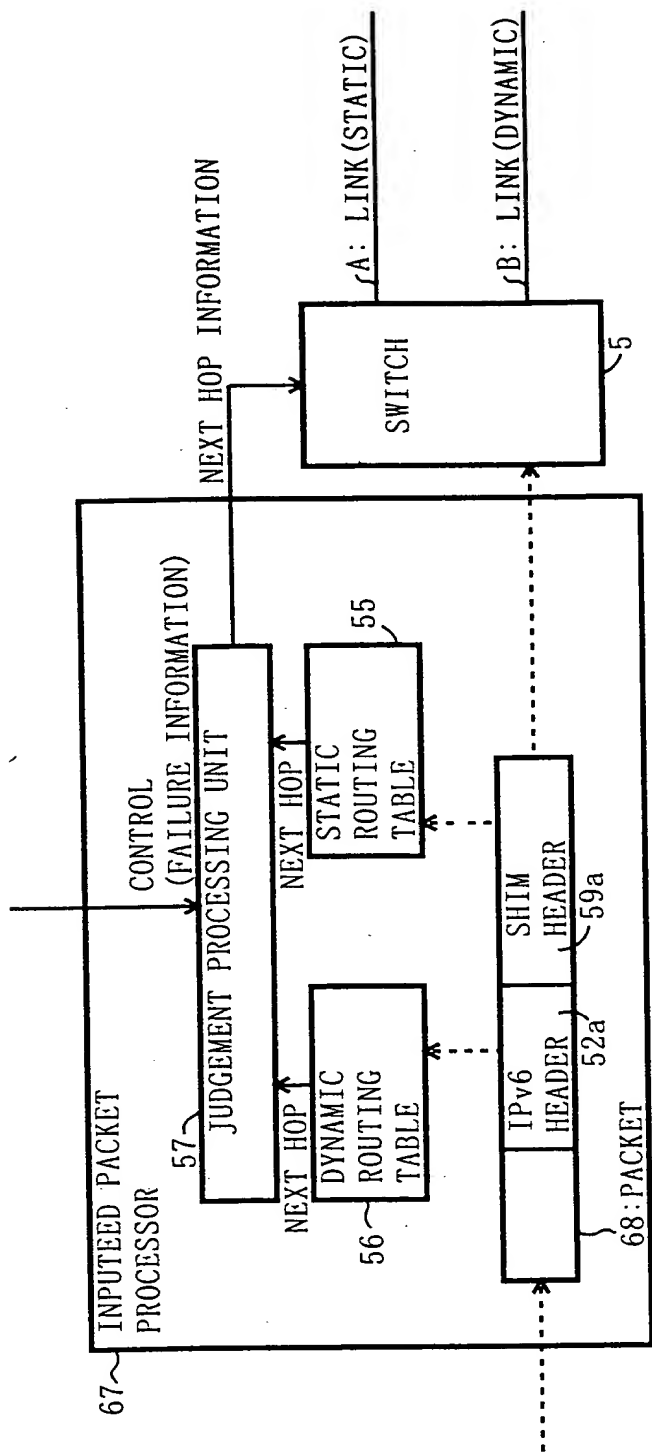


FIG. 15

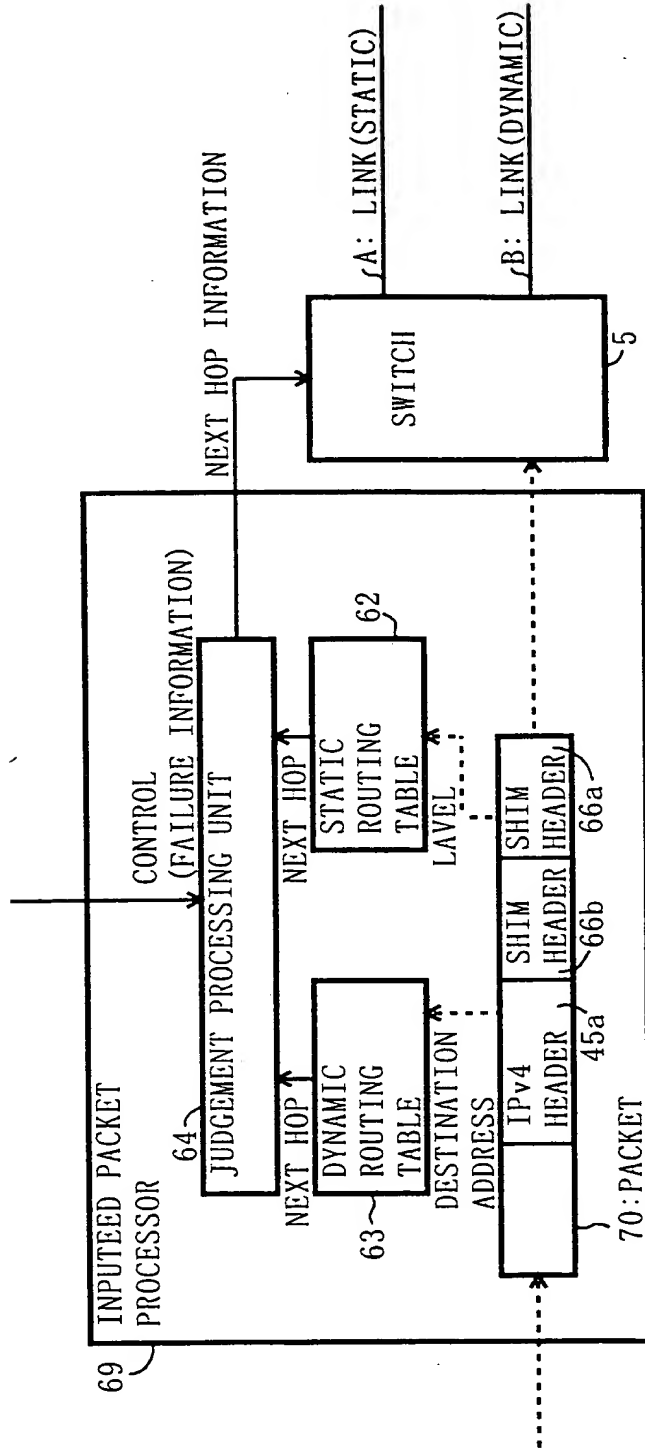


FIG. 16

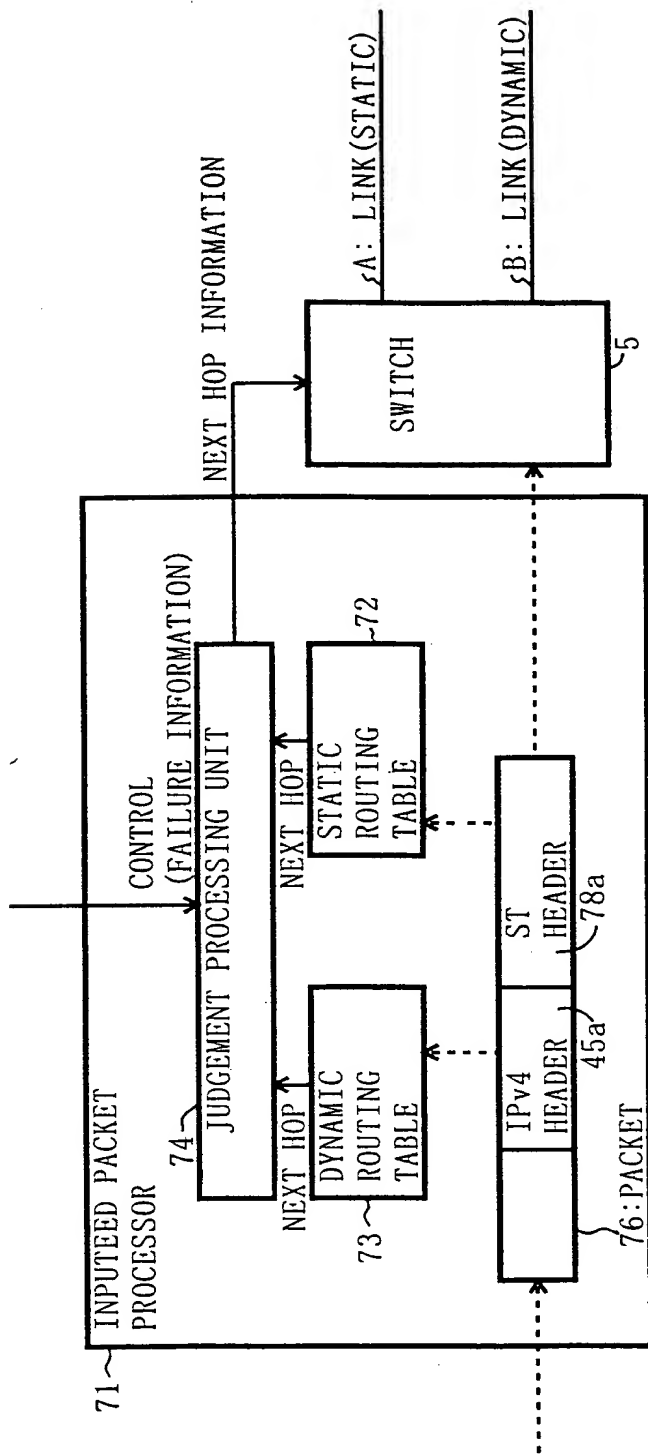


FIG. 17

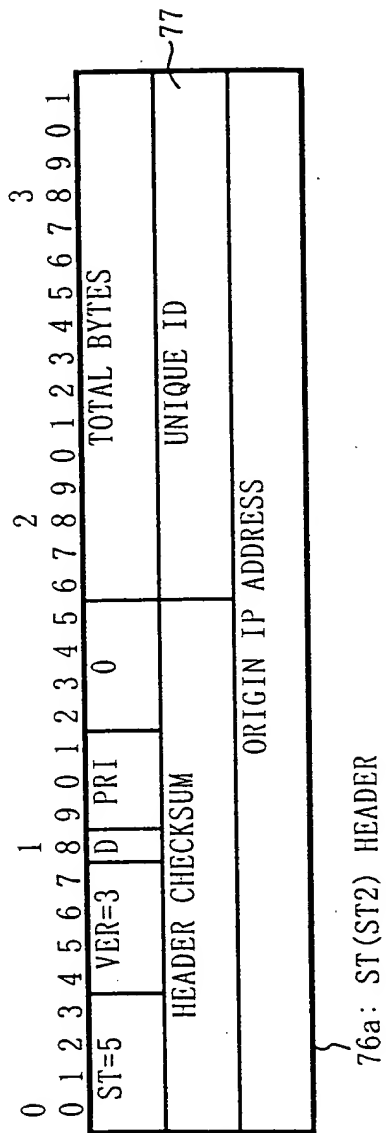
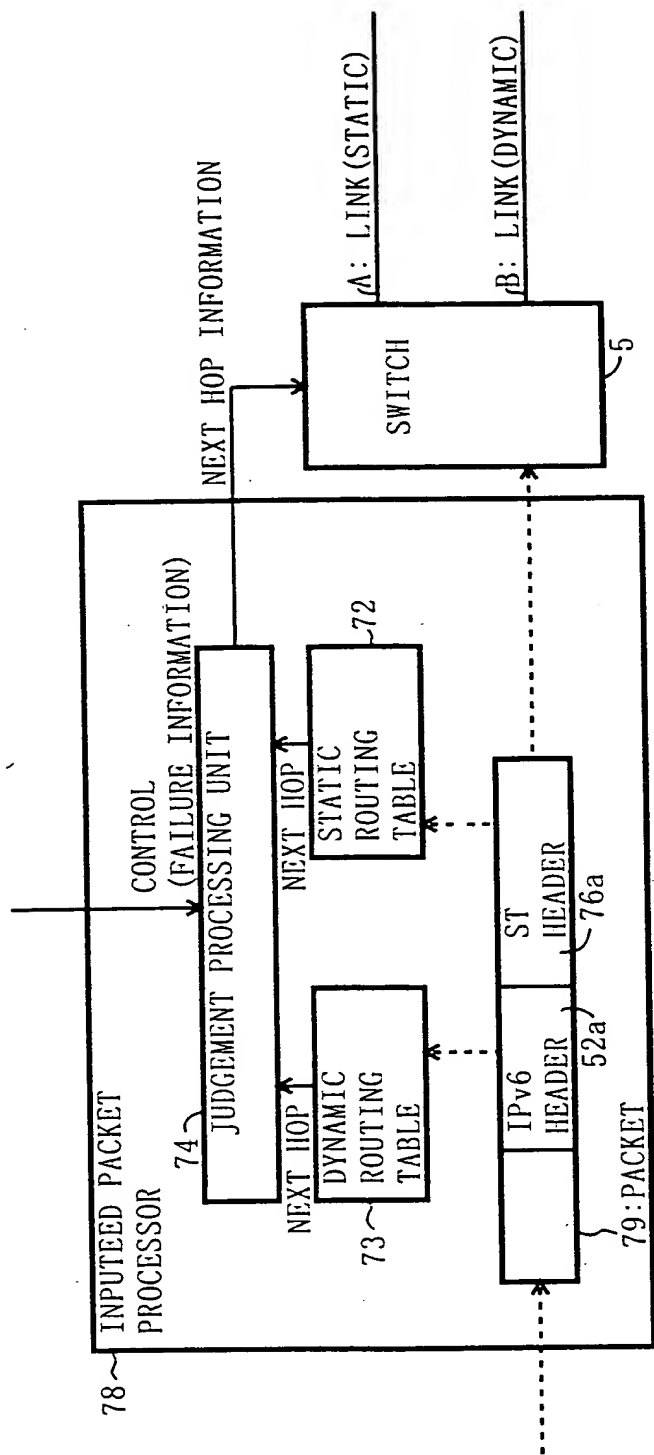


FIG. 18



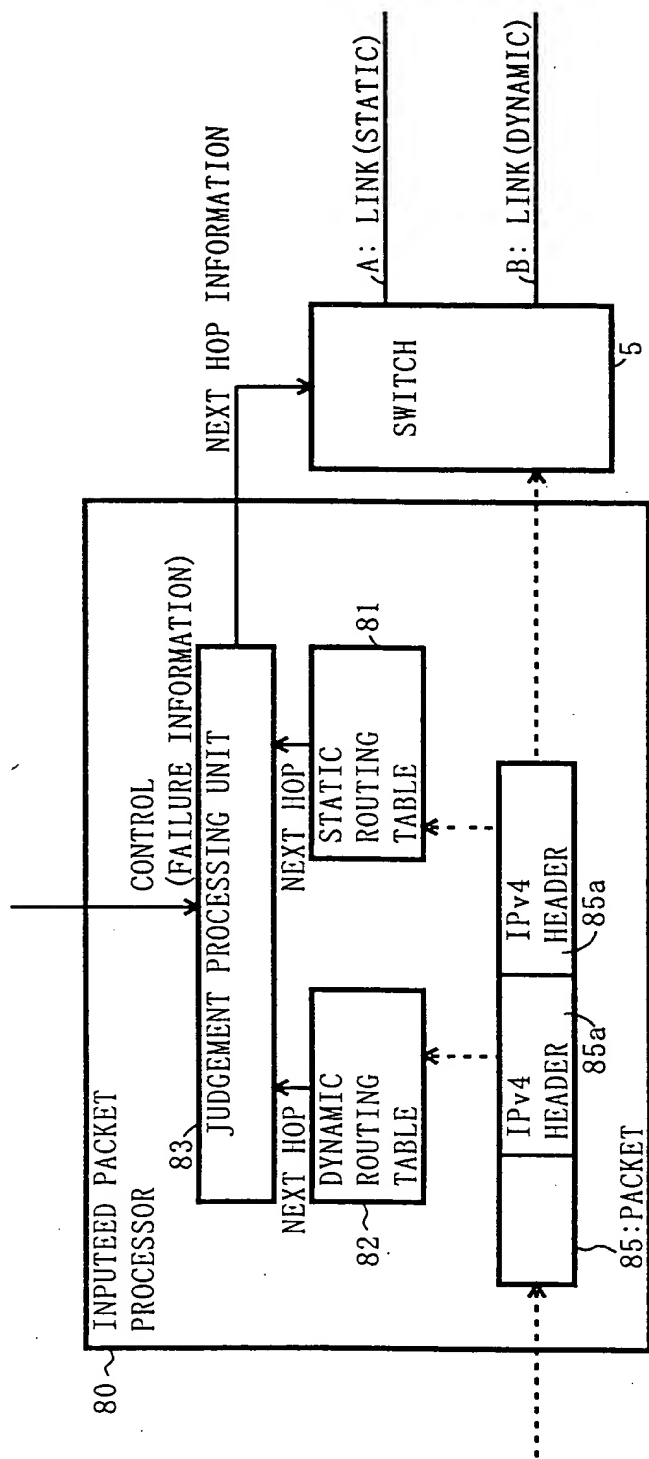


FIG. 20

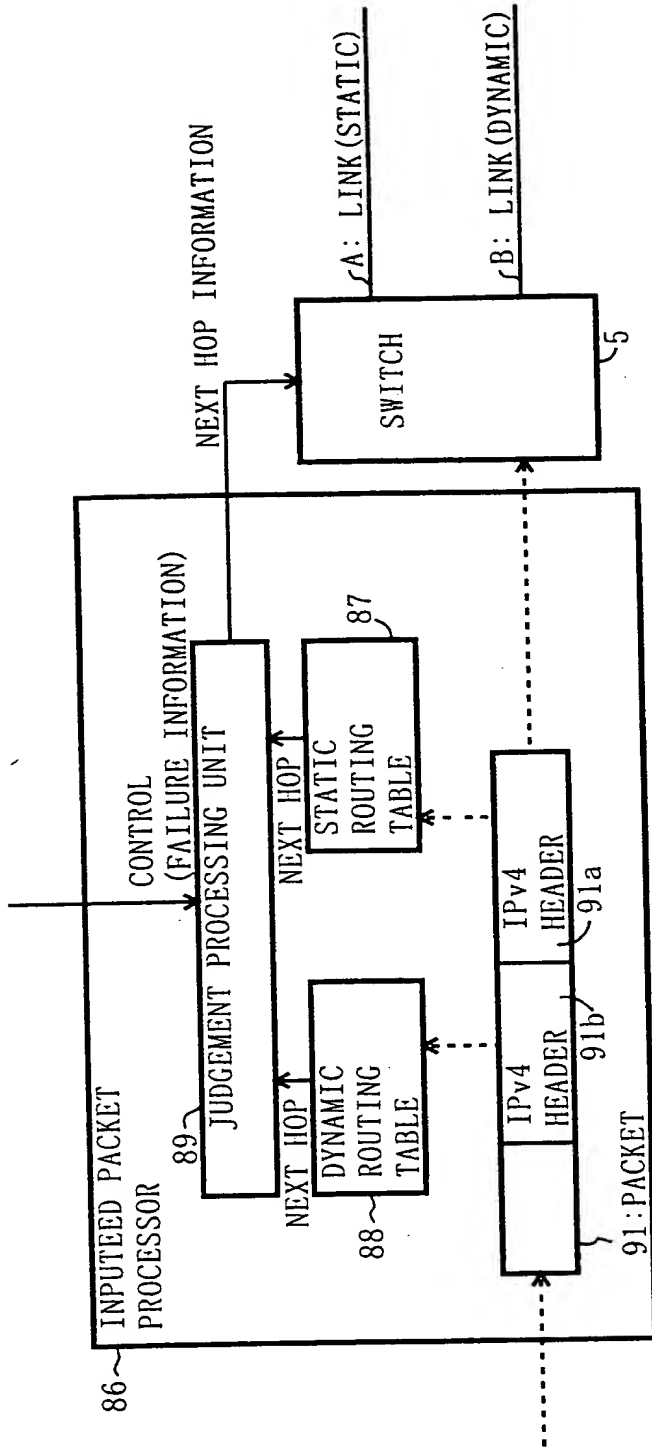


FIG. 21

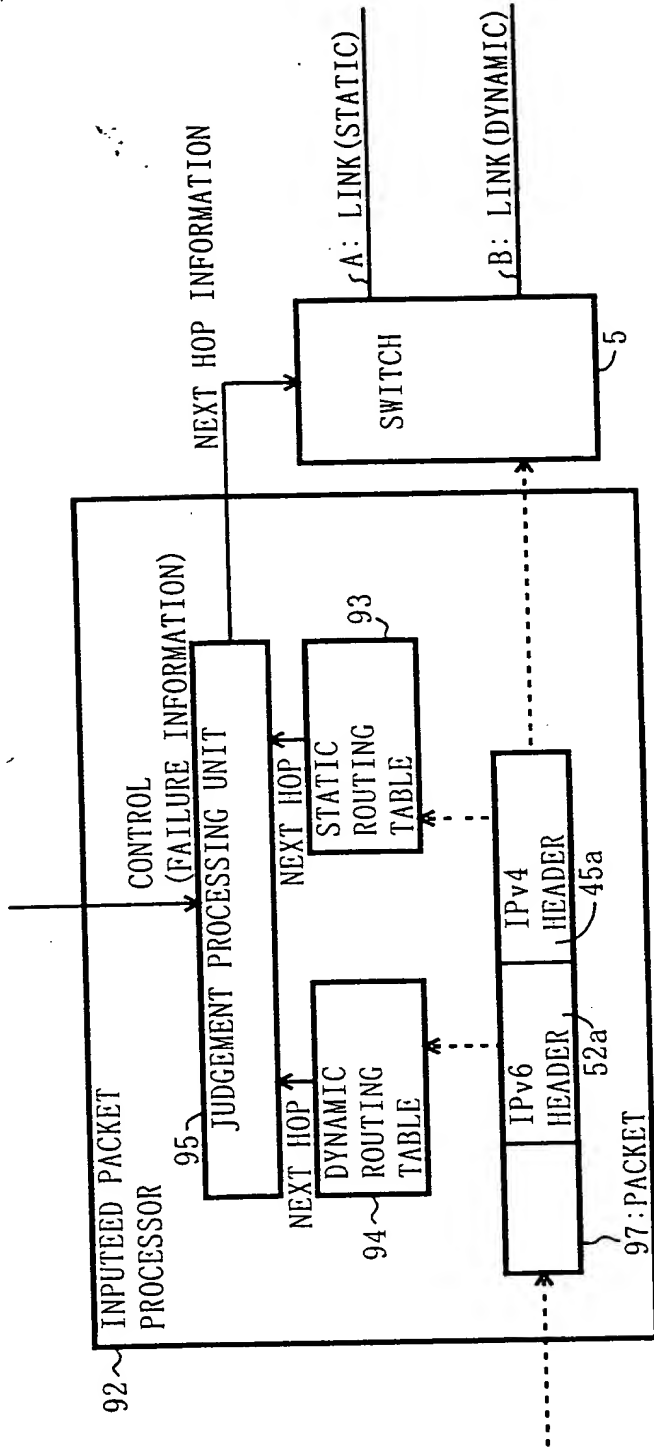


FIG. 22

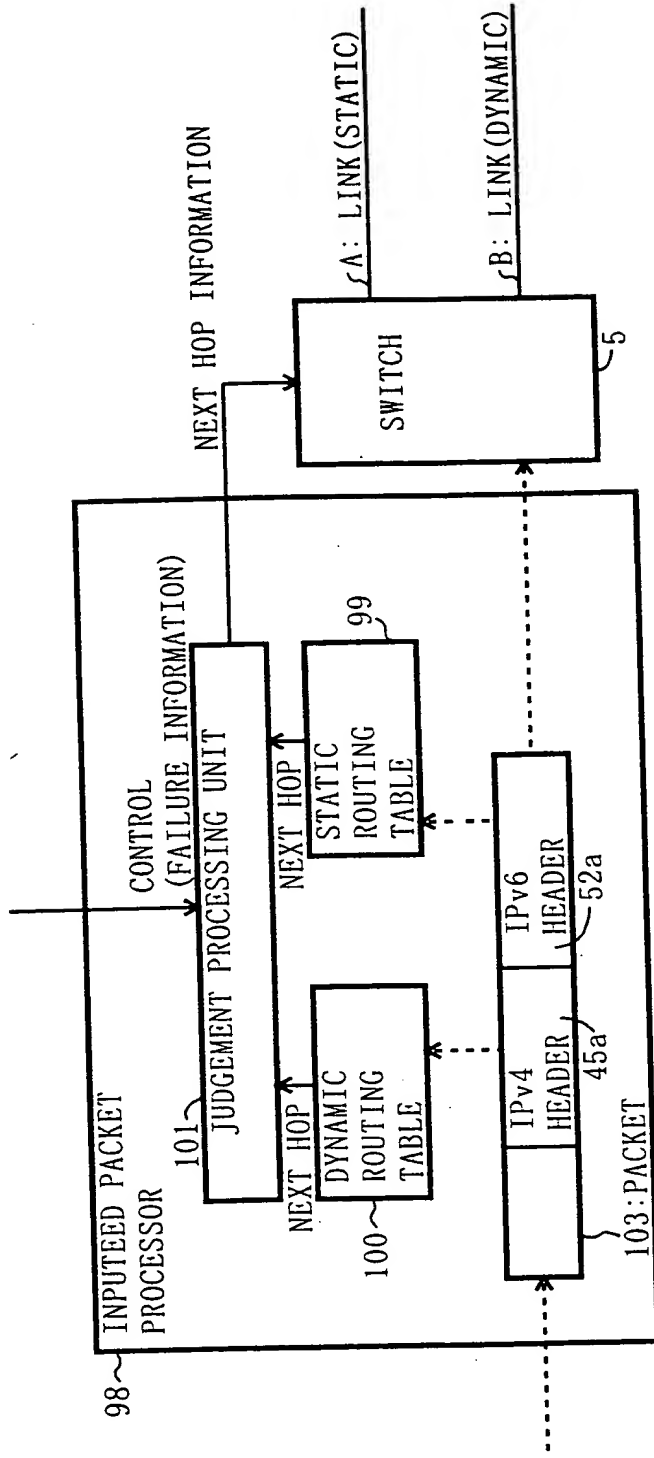


FIG. 23


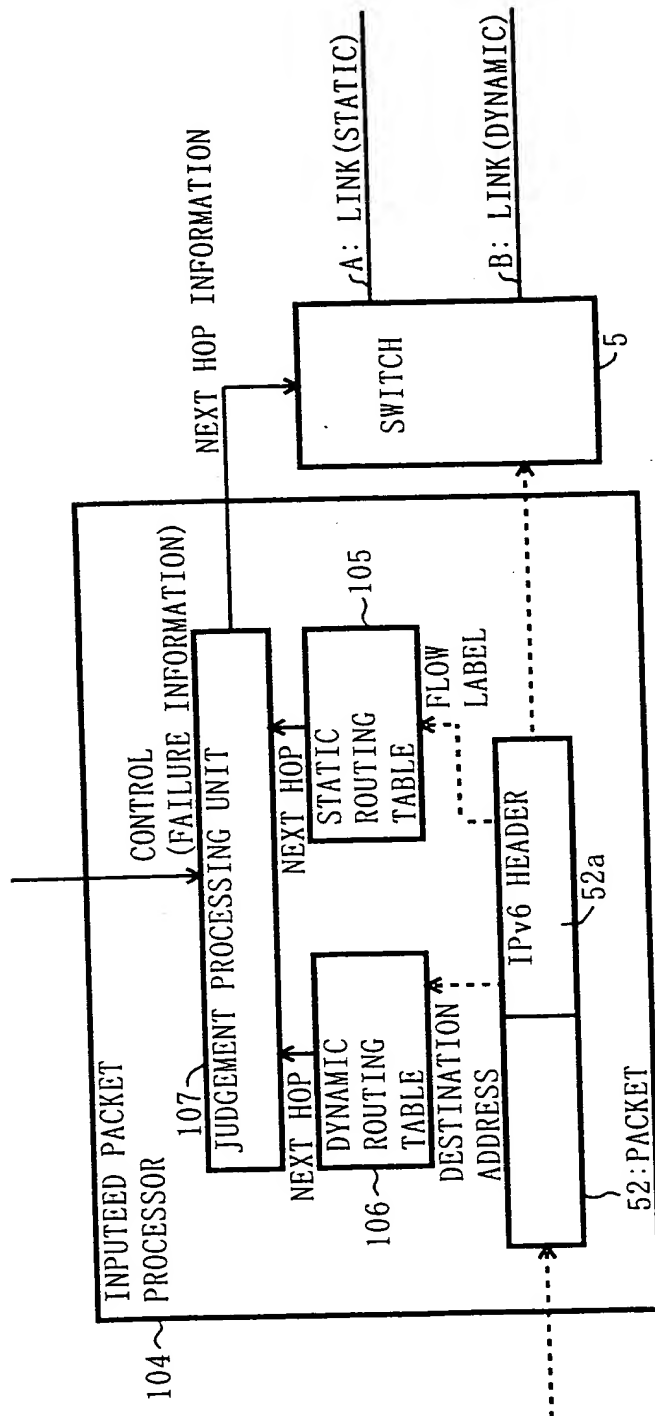


FIG. 24

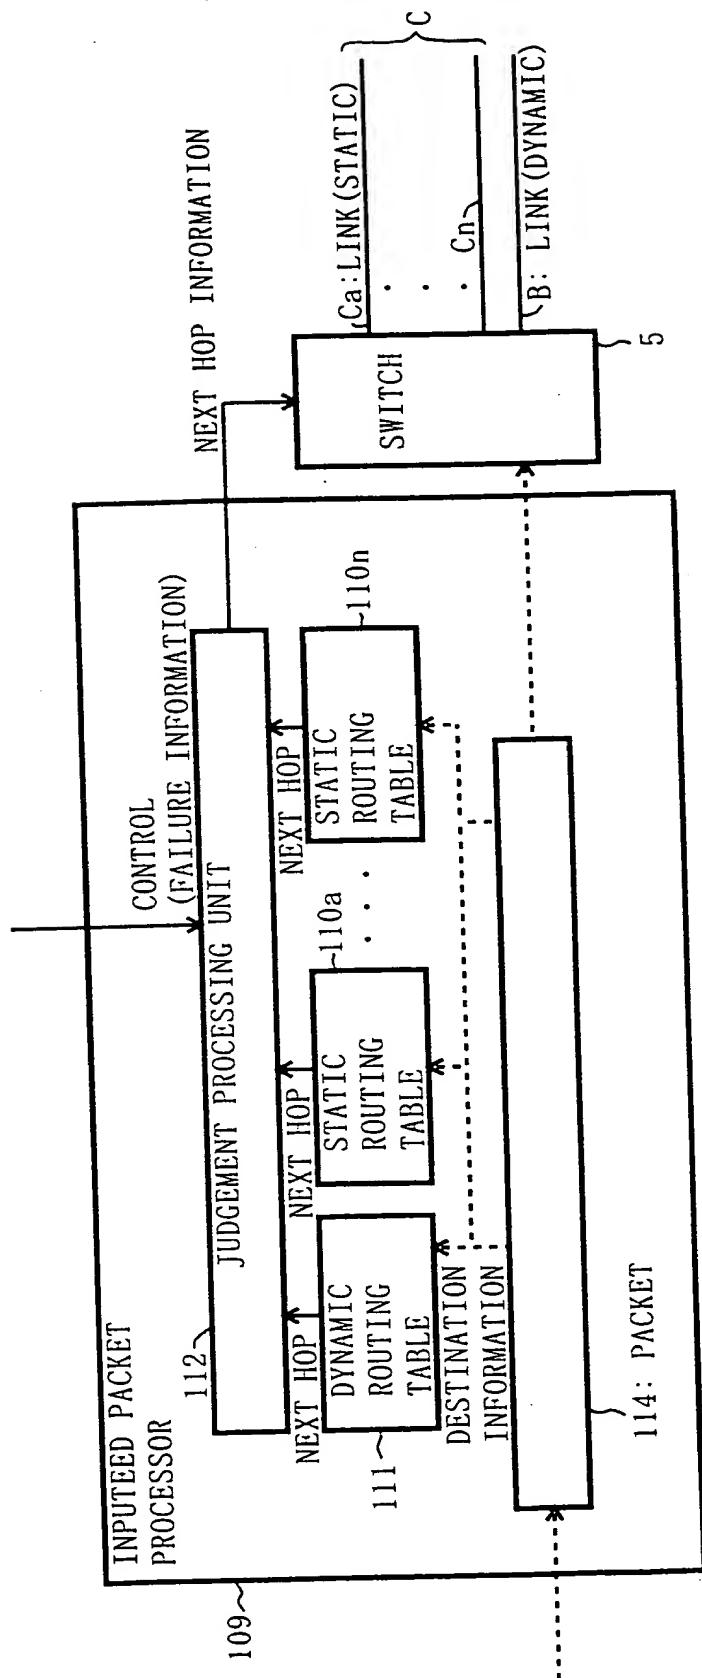

F I G . 2 5

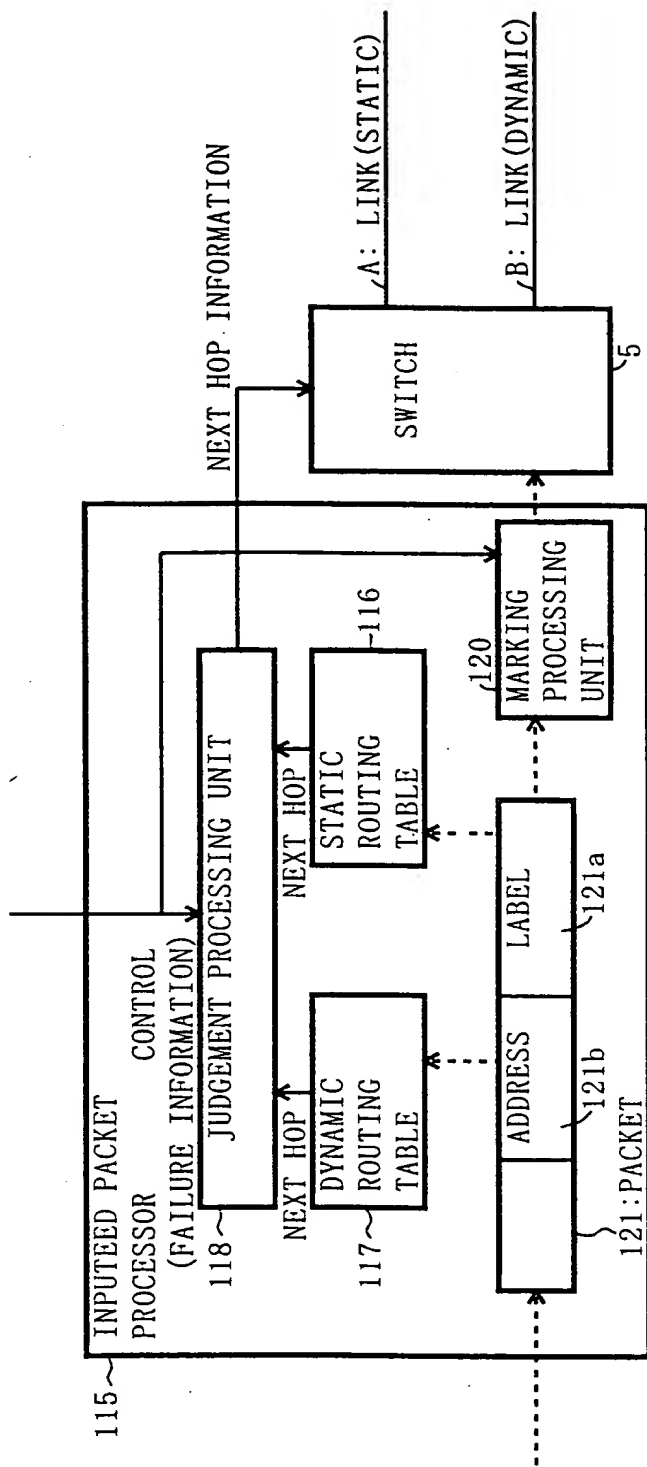


FIG. 26

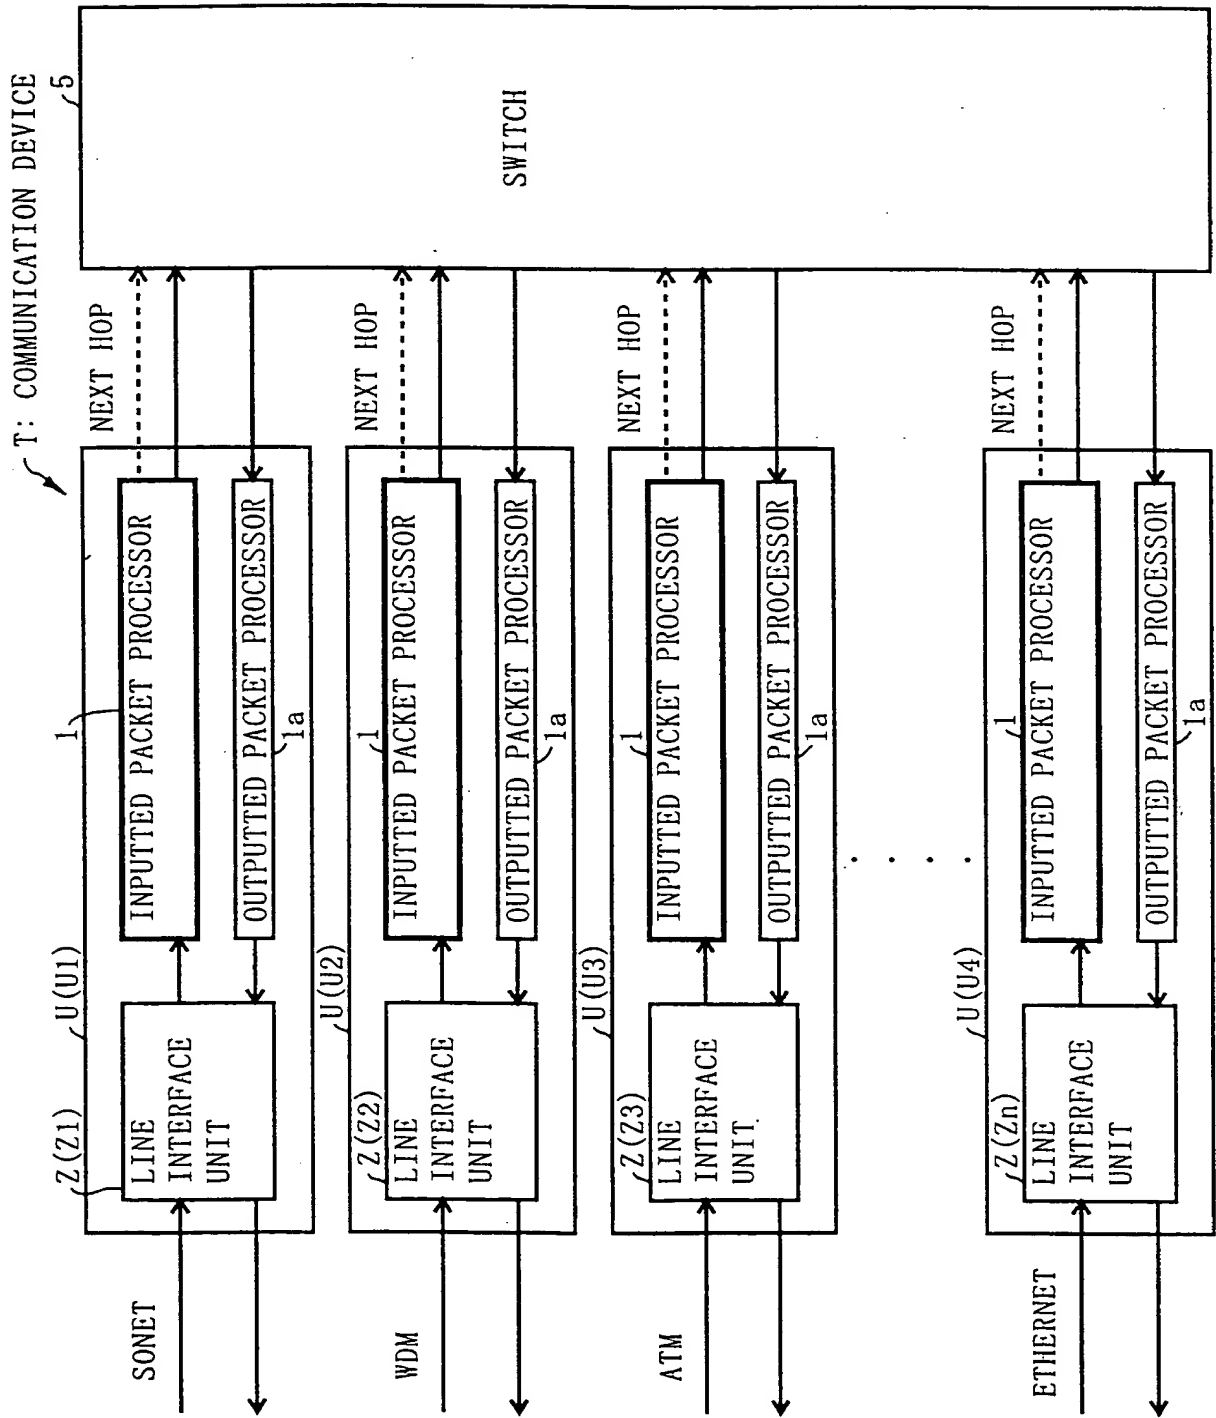
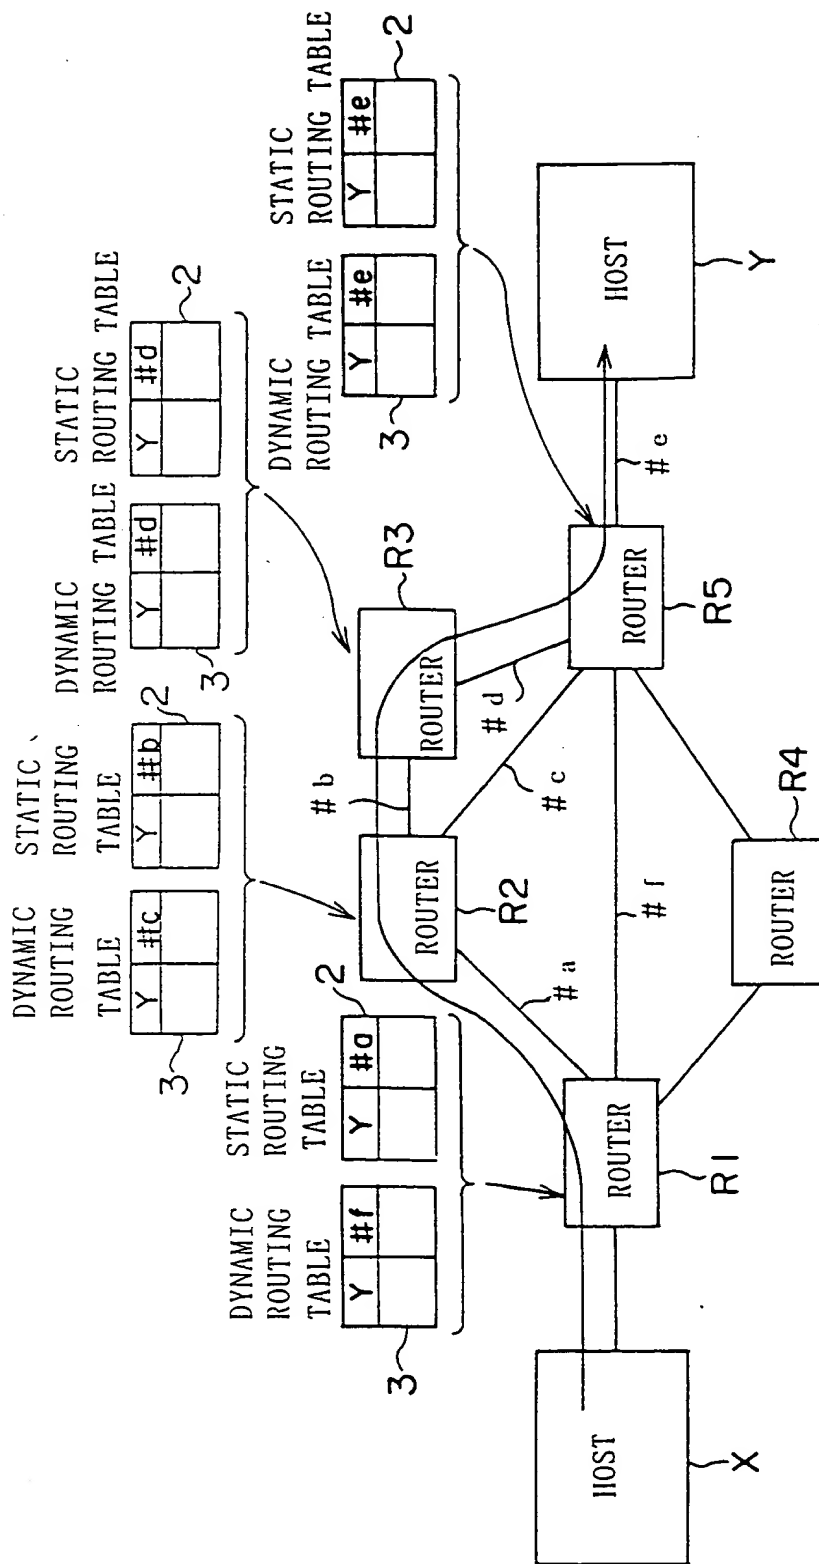
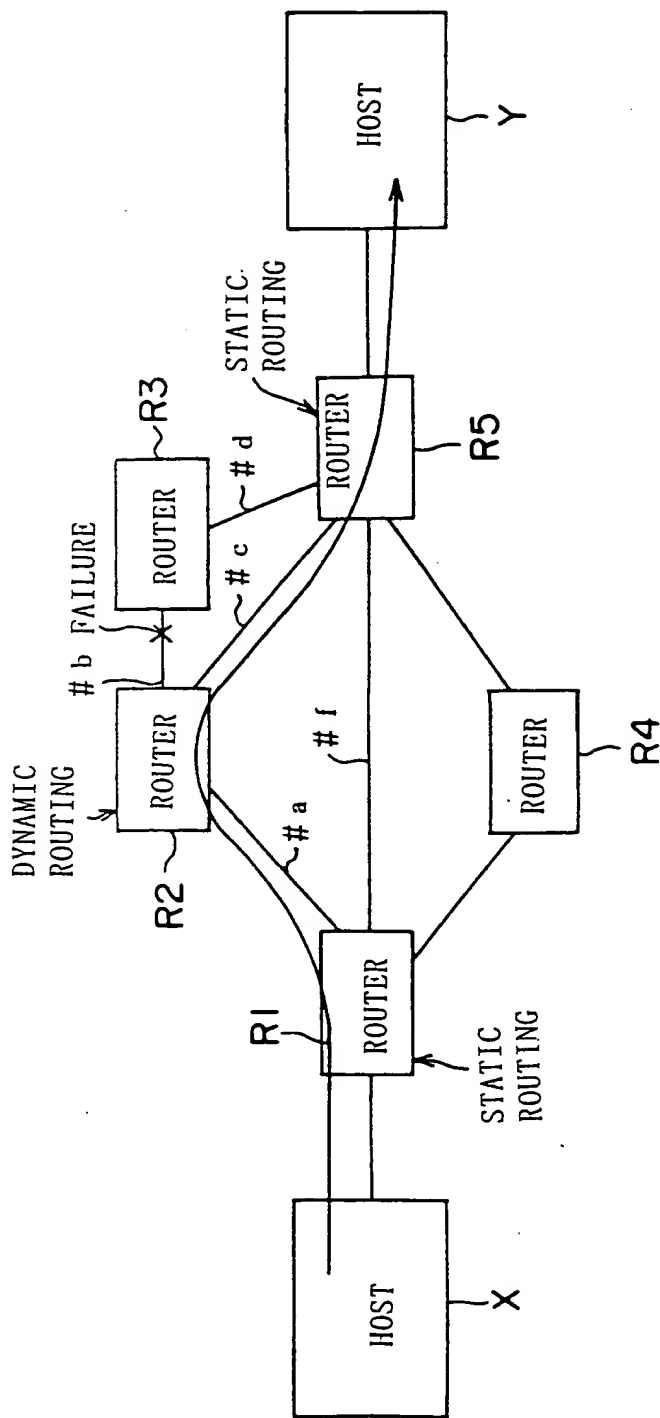


FIG. 27





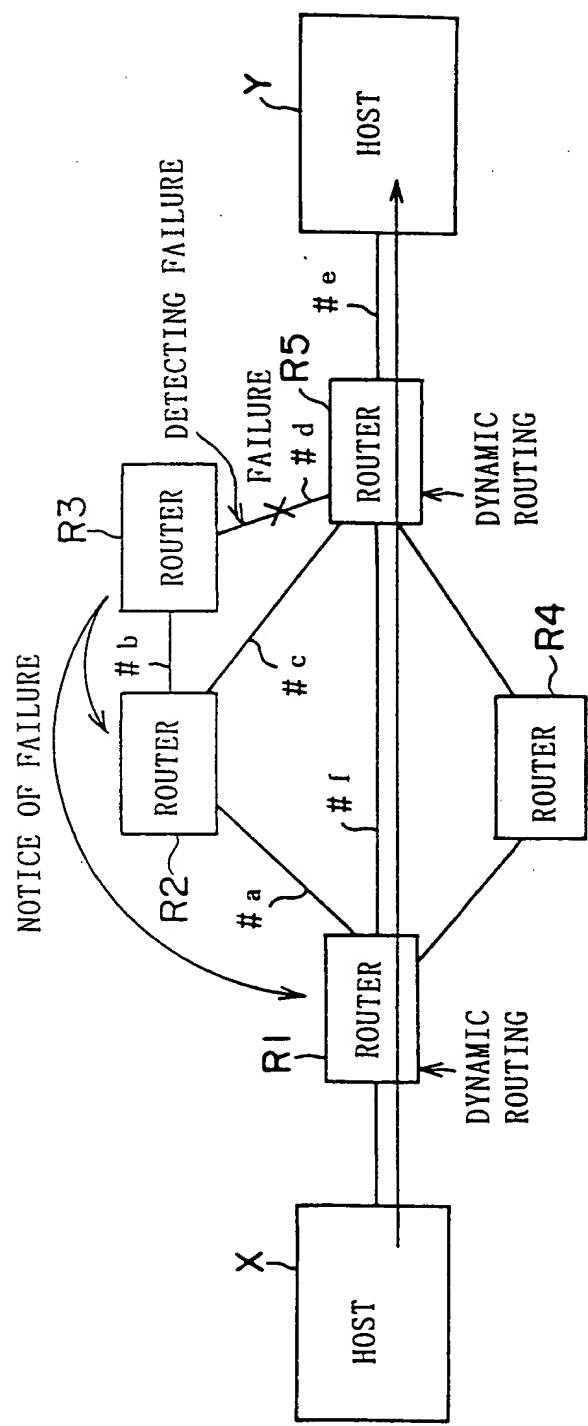


FIG. 30

